


# DIN 915

ISO 4028  
ГОСТ 11075-93

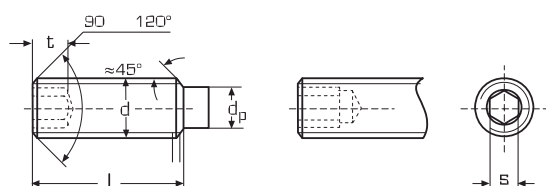

**Винт стопорный с цапфой**  
Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

<b>dp</b>	1,0	1,5	2,0	2,5	3,5	4,0	5,5	7,0	8,5	12,0
<b>t</b>	0,8	1,2	1,2	1,5	2,0	2,0	3,0	4,0	4,8	6,4
<b>e</b>	1,003	1,427	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15
<b>s</b>	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0

d1	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16
<b>l 2</b>										
<b>3</b>		0,012	0,012							
<b>4</b>	0,006		0,013	0,012						
<b>5</b>		0,012	0,016	0,020	0,040					
<b>6</b>		0,015	0,019	0,029	0,050	0,075				
<b>8</b>		0,020	0,028	0,044	0,071	0,102	0,188			
<b>10</b>		0,025	0,037	0,059	0,095	0,129	0,228	0,241		
<b>12</b>		0,032	0,046	0,074	0,119	0,163	0,268	0,441	0,891	
<b>14</b>						0,199	0,394			
<b>16</b>			0,064	0,104	0,167	0,234	0,394	0,605	0,891	
<b>20</b>			0,082	0,134	0,215	0,304	0,520	0,802	1,100	2,010
<b>25</b>			0,101	0,166	0,275	0,392	0,679	1,050	1,460	2,510
<b>30</b>			0,124	0,212	0,330	0,480	0,838	1,300	1,820	3,190
<b>35</b>						0,568	0,997	1,550	2,180	3,820
<b>40</b>						0,656	1,160	1,800	2,540	4,490
<b>45</b>						0,740	1,323	2,050	2,800	5,160
<b>50</b>						0,808	1,486	2,223	3,100	5,830
<b>55</b>								2,550	3,400	
<b>60</b>						1,013	1,812	2,653	3,800	7,170
<b>70</b>									4,700	8,500
	500	500	500	200	200	200	100	100	50	25

Вес 100 шт./кг